

TM-RR170 17.0" Rack mount industrial Monitor




● Specification

Basic	
Front panel	Magnesium-Aluminum alloy, anodized treatment
Rear panel	SGCC plate sheet, sand-blasting
Control button	OSD button on rear panel
Signal input	1*VGA, 1*DVI
Mount method	Standard 19.0 rack mount, support VESA 75/100
Overall dimension	482.0 * 354.0 * 51 (mm)
Net weight	4.4KG
IP rating	Front Panel IP65
LCD display	
Size & Type	17.0" TFT LCD
Resolution	1280 * 1024
Backlit & MTBF	LED backlit & 30 000 hours
Brightness	250 nits
Display area	337.92 * 270.34
View angle	85/85/80/80
Touch	
Type	High-temp. 5-wires precision resistive touchscreen
Touch interface	USB (Optional RS232)
Response time	<5 ms
Click life	250g/ 35 million times
Draw life	250g/ 5 million times
Special treatment	PET film laminated, true flat design
Power & environmental	
Voltage input	DC 12V (Optional with DC 9~36V)
Operating temp.	0 ~ + 50℃
Storage temp.	-20 ~ + 60℃
Relative humidity	10 ~ 95% @ 10C (No condensation)

Vibration	50 ~ 500 Hz, 1.5G, 0.15mm peak to peak
Shock	10G/Peak (11ms)
Power consumption	Around 20W
EMC	CE/FCC Class A

● Dimension

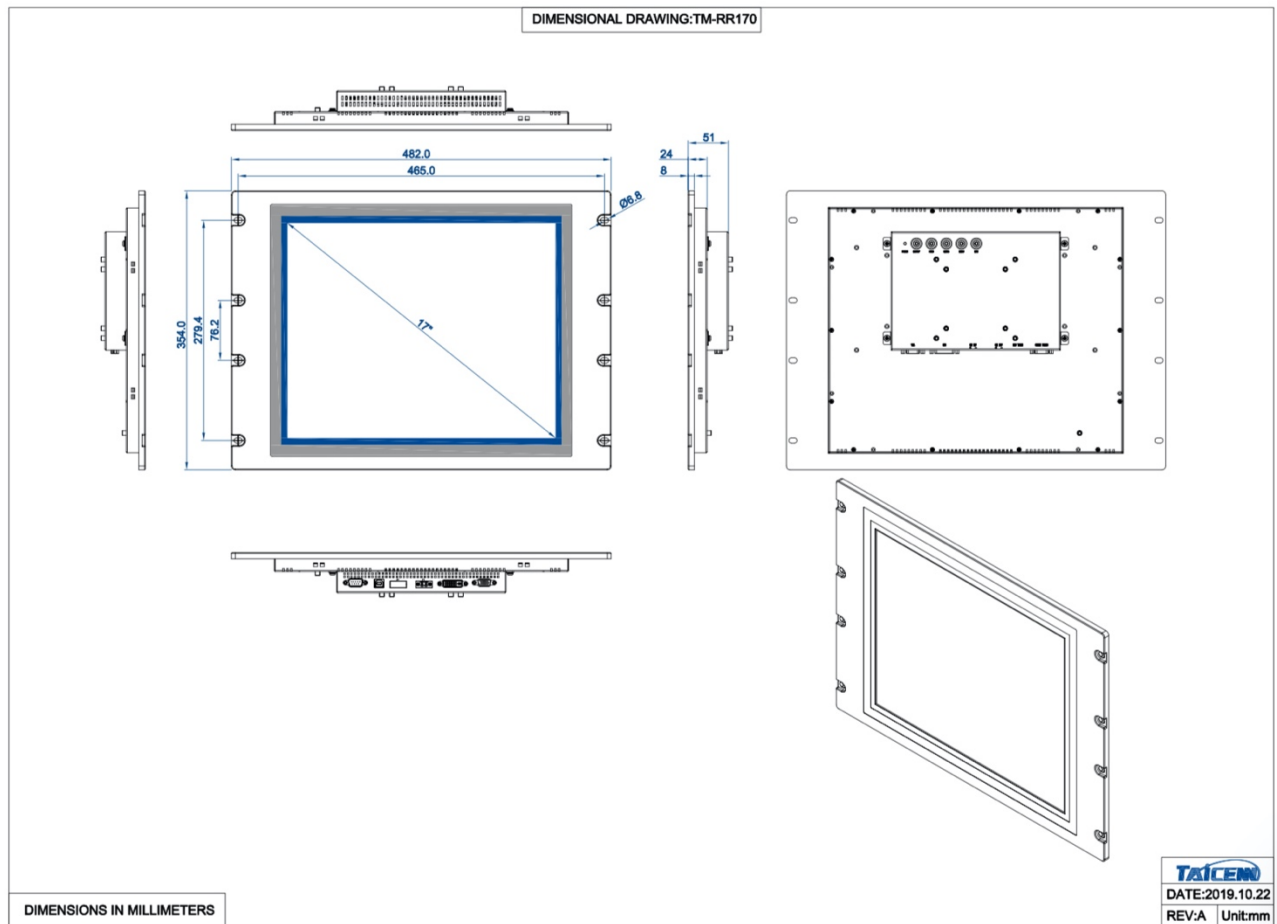

● Ordering information

TM-RR170	17.0" LCD, 1280*1024, Resistive touch, USB interface, 1*VGA, 1*DVI, DC 12v, 40W power adapter
TM-RR170W	17.0" LCD, 1280*1024, Resistive touch, USB, 1*VGA, 1*DVI, DC 9~36v, default no power adapter
TM-RR170S	17.0" LCD, 1280*1024, Resistive touch, RS232 interface, 1*VGA, 1*DVI, DC 12v, 40W power adapter
TA-DVI2HDMI	HDMI to DVI convert cable, 1.8m length
TA-PSU02	40W power adapter (Optional to order when wide voltage input)